

## Description

The Lyzard-KZ14RI is an ultra-micro line array speaker in the smallest K-array's mid-high speaker series, specifically designed for recessed in-wall installation. Lyzard-KZ14RI comes with a spring-loaded metal clip for fast and easy mounting.

With a small ultra-resistant milled aluminum enclosure measuring 28 x 10.6 cm x 1.1 cm and weighing only 59g, the Lyzard-KZ14RI delivers uncompromised audio performance with minimum residual noise.

The 4 x 1 high-efficiency transducers feature neodymium magnets and suspensions engineered for maximum linear excursion and minimum residual noise.

With a vertical coverage of 40° and horizontal of 140°, it is the smallest model with PAT array technology. With a frequency response of 500 Hz to 18 kHz, and an impressive peak SPL of 98 dB, the Lyzard-KZ14RI delivers clear audio reproduction and excellent intelligibility.

To complete the full frequency range, the Lyzard-KZ14RI has to be paired with one or more Truffle or Rumble subwoofers driven by a Kommander amplifier. The speaker can also be customized with any RAL color painting or premium finishes such as polished aluminum, 24K gold, rose gold or antique gold plating.

RAL color painting or premium finishes such as polished aluminum, 24K gold, rose gold or antique gold plating. The front of the loudspeaker's small cabinet is protected by a removable magnetic grille for easy access during setup and maintenance.

The rear panel includes a small two-pole screw Euroblock connector for easy connection. The Lyzard-KZ14RI and KZ14RI are the perfect products for discreet audio integration in a variety of environments, leaving both your eyes fulfilled and your ears satisfied with their unique and sleek design.

The main product models and codes are:

KZ14RI KZ14RI black model /black recessed model

KZ14RIW KZ14RIW white model / white recessed model

KZ14RIX KZ14RIX customizable color (box + grille) / customizable recessed color (box + grille)

All Lyzard KZ14RI KZ14RI components are designed by the K-array R&D department and are custom-made under the K-array quality control system in Italy.


Technical Specifications	
Type	Line Array PAT
Transducers	4 x 0.5" Neodymium magnet woofers
Frequency Response <sup>1</sup>	500 Hz - 18 kHz (-6 dB)
Max SPL <sup>2</sup>	98 dB (peak)
Coverage	V. 40°   H. 140°
Power Handling	15 W
Nominal Impedance	16 Ω
Connectors	IN+ IN- screw terminals

Handling & Finishes	
Material	Aluminum
Color	Black, White, Custom RAL
Finishes	24K Gold, Rose Gold, Antique Gold, Polished
IP Rating	IP64
Dimensions (WxHxD)	28 x 106 x 11 mm (1.1 x 4.2 x 0.4 in)
Weight	0.059 kg (0.130 lb)

<sup>1</sup> With dedicated preset.

<sup>2</sup> Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

# Lyzard-KZ14I - Lyzard-KZ14RI

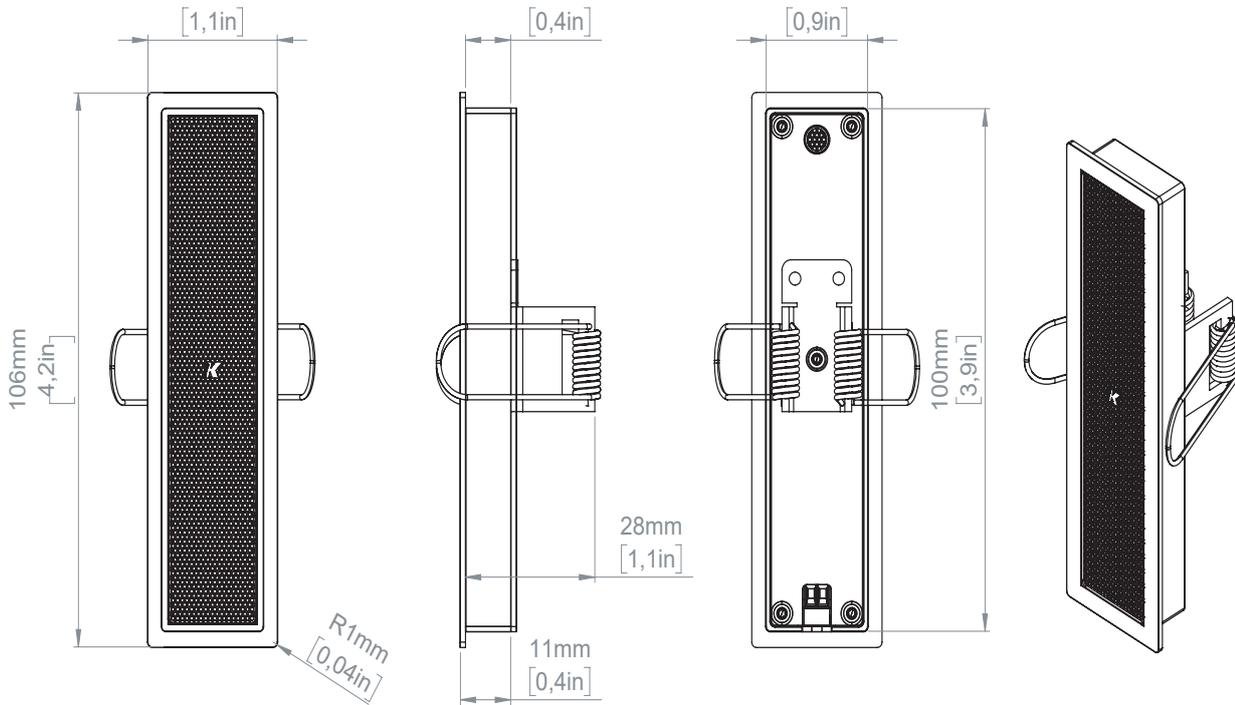

Notes:  
Passive loudspeakers require dedicated presets loaded onboard K-array amplifiers.  
New materials and designs are introduced into existing products without previous notice.  
Present systems may differ in some respects from those presented in this catalog.